



User Manual

POWER STATION 200W







Please read the user manual carefully when you use this product. You should follow all the instructions.

Important Information

Please read the user manual carefully when you use this product. You should follow all the instructions.

- When children are using the product, please make sure they have close supervision to reduce the risks.
- It will increase the risk of electric shock if you use non-recommended products or accessories.
- Please make sure to use the product in a ventilated environment.
- Please keep the product in a dry and ventilated place to avoid moisture and electric shock.
- Please remove the power plug when the product is not in use.
- Do not expose the product to fire or excessive temperatures. It will explode if the temperature is over 130°.
- Do not disassemble the product. It may cause fire, explosion, injury, and unpredictable risks.
- Do not use the product with damaged wires or plugs, or damaged output cables. It may cause an electric shock.



LCD Screen

LCD Screen will display charge and discharge. When you use the product, it will display the remaining power.



The current power of the product. It is displayed as a percentage (%).



The using time of current power.



The current total output power.



Press DC for DC port function. Press USB for USB port function.



Press USB and plug Type-c cable for Type-C port function.



Press AC for AC port function.



The fan is working if the temperature is over 40 °C.



Overload warning.



Temperature warning of Inverter. Temperature range 90°~95 °C.

LED Flashlight

Press LED and turn on the LED flashlight, hold on button for 2~3 seconds for SOS function, press button one more time to turn off.

DC Input

- Support AC adaptor charging.
- Support car charger charging.
- Support Solar Panel charging (12-30V).


Button: Press button to turn on and press button one more time to turn off.

SPECIFICATIONS

Capacity	15Ah 14.8V 222Wh	DC Input	DC 12-30V
DC Output	12V/10A	USB-A Output	5V 2.4A*3
AC Output	120V-60Hz, Continuous 200W (Peak 400W)	USB-C Output	PD 60W 5V 3A/9V 3A/12V 3A 15V 3A/20V 3A


Battery	Lithium-ion	Weight	N.W : 5.7 lbs
Management System	Temperature control Surge protection Short circuit protection Over-current protection Low-voltage protection	Dimensions	8.1"L x 4.1"W x 8.3"H
Operating Temperature	-20 to 60 °C	Recharging Temperature	0 to 45 °C
Lifecycles	>800 Cycles	Certifications	FCC/CE/PSE/RoHS
Warranty	12 Months		

WHAT'S IN THE BOX

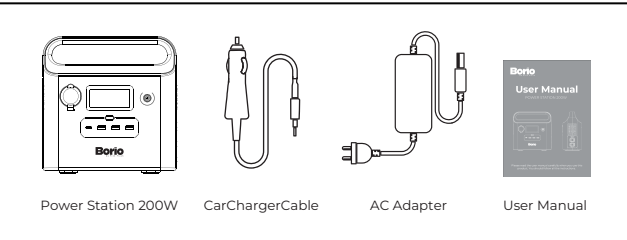

Support charging device

USB port: Smart phones, tablets, smart watches, digital cameras, e-readers, etc.
12V Car charger port: Car charger.
DC output: Drones, routers, car refrigerators, etc. use 12V as the power supply device. AC power: Laptops, displays, appliances, etc.

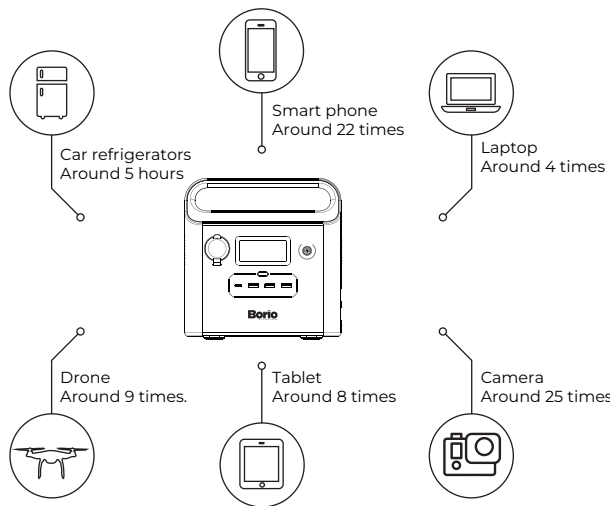

Charging method

Before using or storage, plug your product into the wall charger until it is fully charged. The LCD screen will display the current charge and when it displays 100%, it means it is fully charged.



Car Charger About 6-7 Hours



Wall Charger About 4 Hours



Solar Panels (Optional)
About 4 Hours (Depending on Weather)

Instruction

How to use this product:

- Plug in your device and press the button which you are going to use.
- When the port icon appears on the LCD screen, the output port will turn on for charging your device.
- The continuous AC output port can only charge/power devices that operate at less than 200 Watts. Once this limit is exceeded, the product will shut off automatically.
- The AC port output will be turned off automatically after 35 minutes when being drawn under 3W power to save power.
- The DC port or car charger port will be off automatically in 8 hours when being drawn under 1W power for power saving.
- If the product is not used for a long time, it should be recharged every 3 months and kept the power at 60% - 80%. Please keep it in a cool and dry place.

Note

Press the AC button to turn off the output to save power when the AC power port is not in use.

For further information on the product, please contact Seed7, LLC by emailing us at support@pinkplush.com
Website: pinkplush.com